


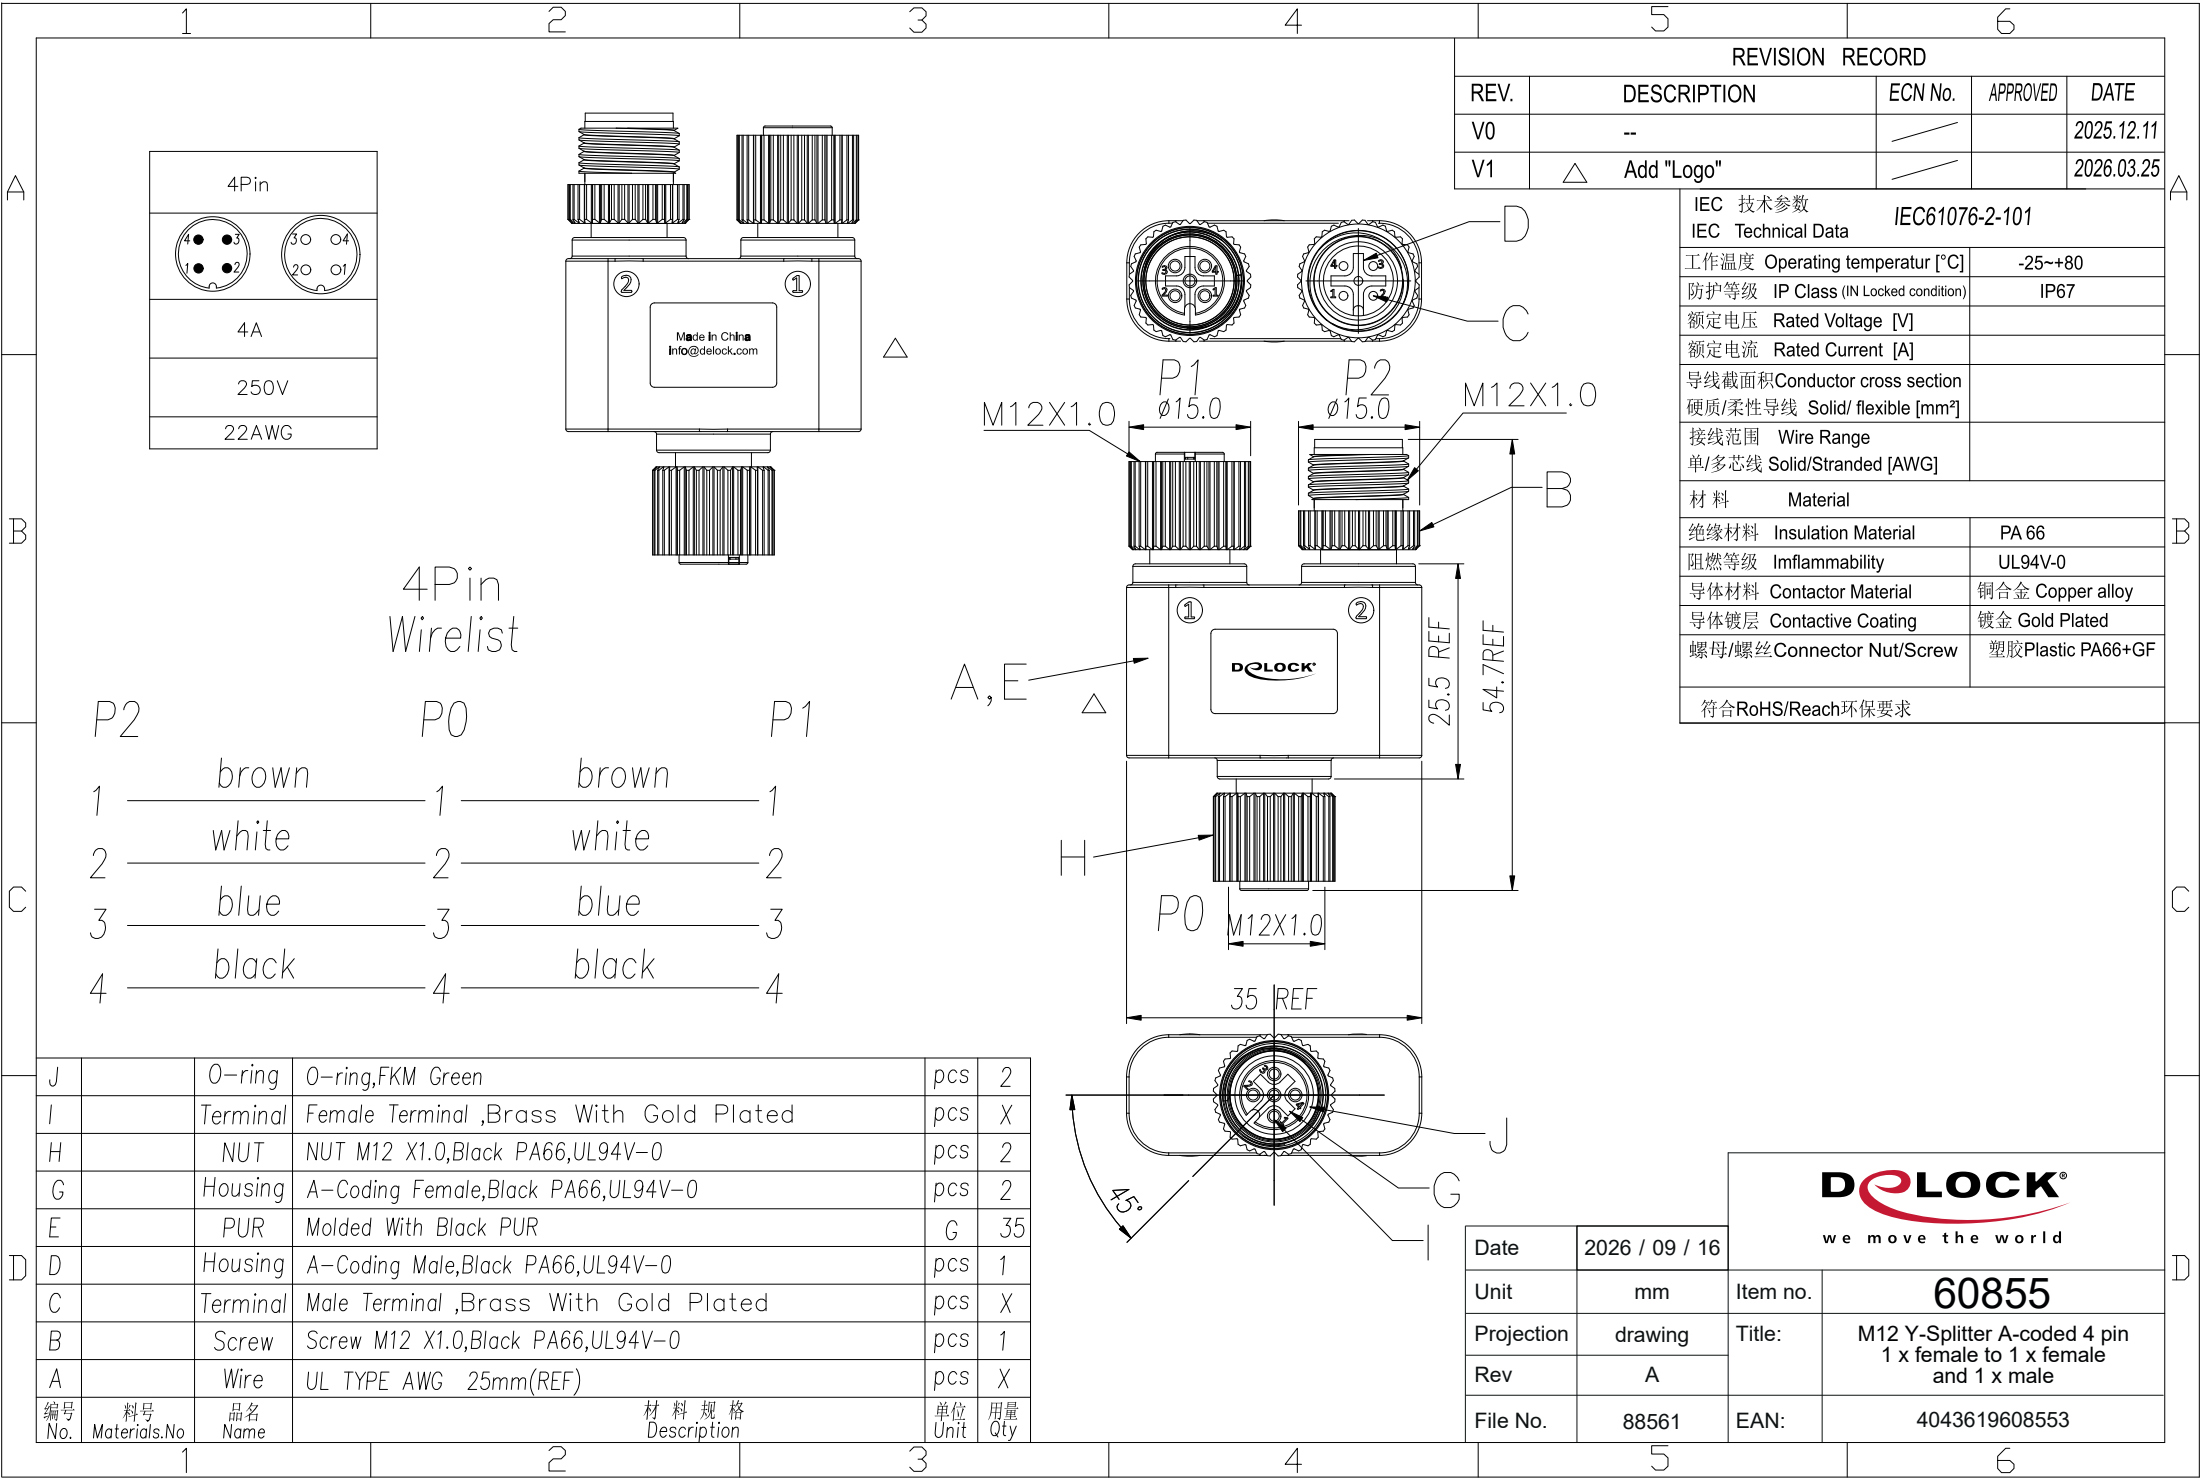

4Pin
4A
250V
22AWG

4Pin Wirelist

P2		P0		P1
1	brown	1	brown	1
2	white	2	white	2
3	blue	3	blue	3
4	black	4	black	4

J		O-ring	O-ring,FKM Green	pcs	2
I		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
H		NUT	NUT M12 X1.0,Black PA66,UL94V-0	pcs	2
G		Housing	A-Coding Female,Black PA66,UL94V-0	pcs	2
E		PUR	Molded With Black PUR	G	35
D		Housing	A-Coding Male,Black PA66,UL94V-0	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M12 X1.0,Black PA66,UL94V-0	pcs	1
A		Wire	UL TYPE AWG 25mm(REF)	pcs	X
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2025.12.11
V1	△ Add "Logo"	/		2026.03.25

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积Conductor cross section		
硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range		
单/多芯线 Solid/Stranded [AWG]		
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contact Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	塑胶Plastic PA66+GF	
符合RoHS/Reach环保要求		

Date	2026 / 09 / 16	 we move the world	
Unit	mm		
Projection	drawing		
Rev	A		
File No.	88561	Item no.	60855
		Title:	M12 Y-Splitter A-coded 4 pin 1 x female to 1 x female and 1 x male
		EAN:	4043619608553