


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--			2025.12.11
V1	△ Add "Logo"			2026.03.25




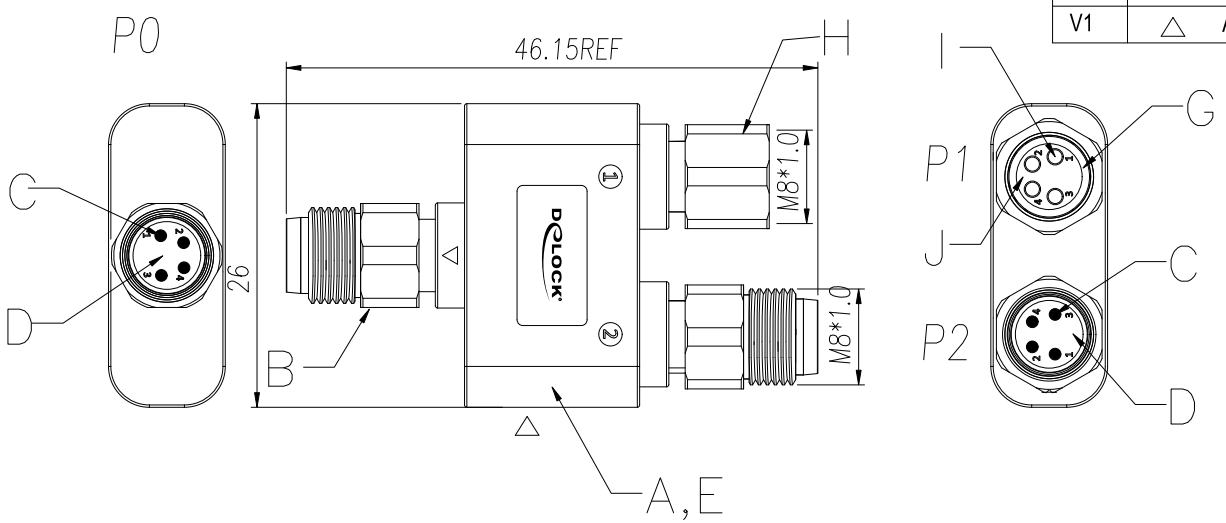

IEC 技术参数 IEC Technical Data	IEC61076-2-104
工作温度 Operating temperatur [°C]	-40~+80
防护等级 IP Class (IN Locked condition)	IP67
额定电压 Rated Voltage [V]	
额定电流 Rated Current [A]	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	
材 料 Material	
绝缘材料 Insulation Material	PA 66
阻燃等级 Imflammability	UL94V-0
导体材料 Contactor Material	铜合金 Copper alloy
导体镀层 Contactive Coating	镀金 Gold Plated
螺母/螺丝Connector Nut/Screw	Zin Alloy With Nickel Plated锌合金镀镍
符合RoHS/Reach环保要求	

4Pin Wirelist

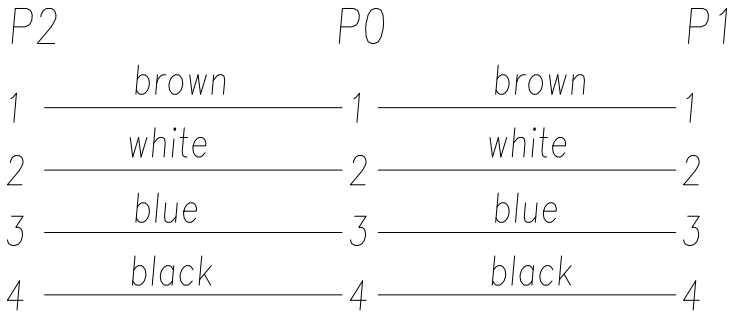

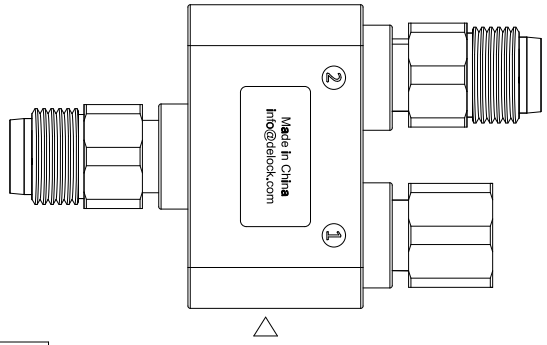

J		Housing	Female,Black PA66 UL94V-0	pcs	1
I		Terminal	Female Terminal ,Copper Alloy With Gold Plated	pcs	X
H		NUT	M8 X1.0,Zin Alloy With Nickel Plated	pcs	1
G		O-ring	O-ring,FKM Orange	pcs	1
E		PUR	Molded With Black PUR	G	35
D		Housing	Male,Black PA66 UL94V-0	pcs	2
C		Terminal	Male Terminal ,Copper Alloy With Gold Plated	pcs	2X
B		Screw	Screw M8 X1.0,Zin Alloy With Nickel Plated	pcs	2
A		Wire	UL TYPE AWG 22mm(REF)	pcs	X
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

Date	2026 / 09 / 16	DELOCK® we move the world	
Unit	mm	Item no.	60858
Projection	drawing	Title:	M8 Y-Splitter A-coded 4 pin 1 x male to 1 x male and 1 x female
Rev	A		
File No.	88561	EAN:	4043619608584