


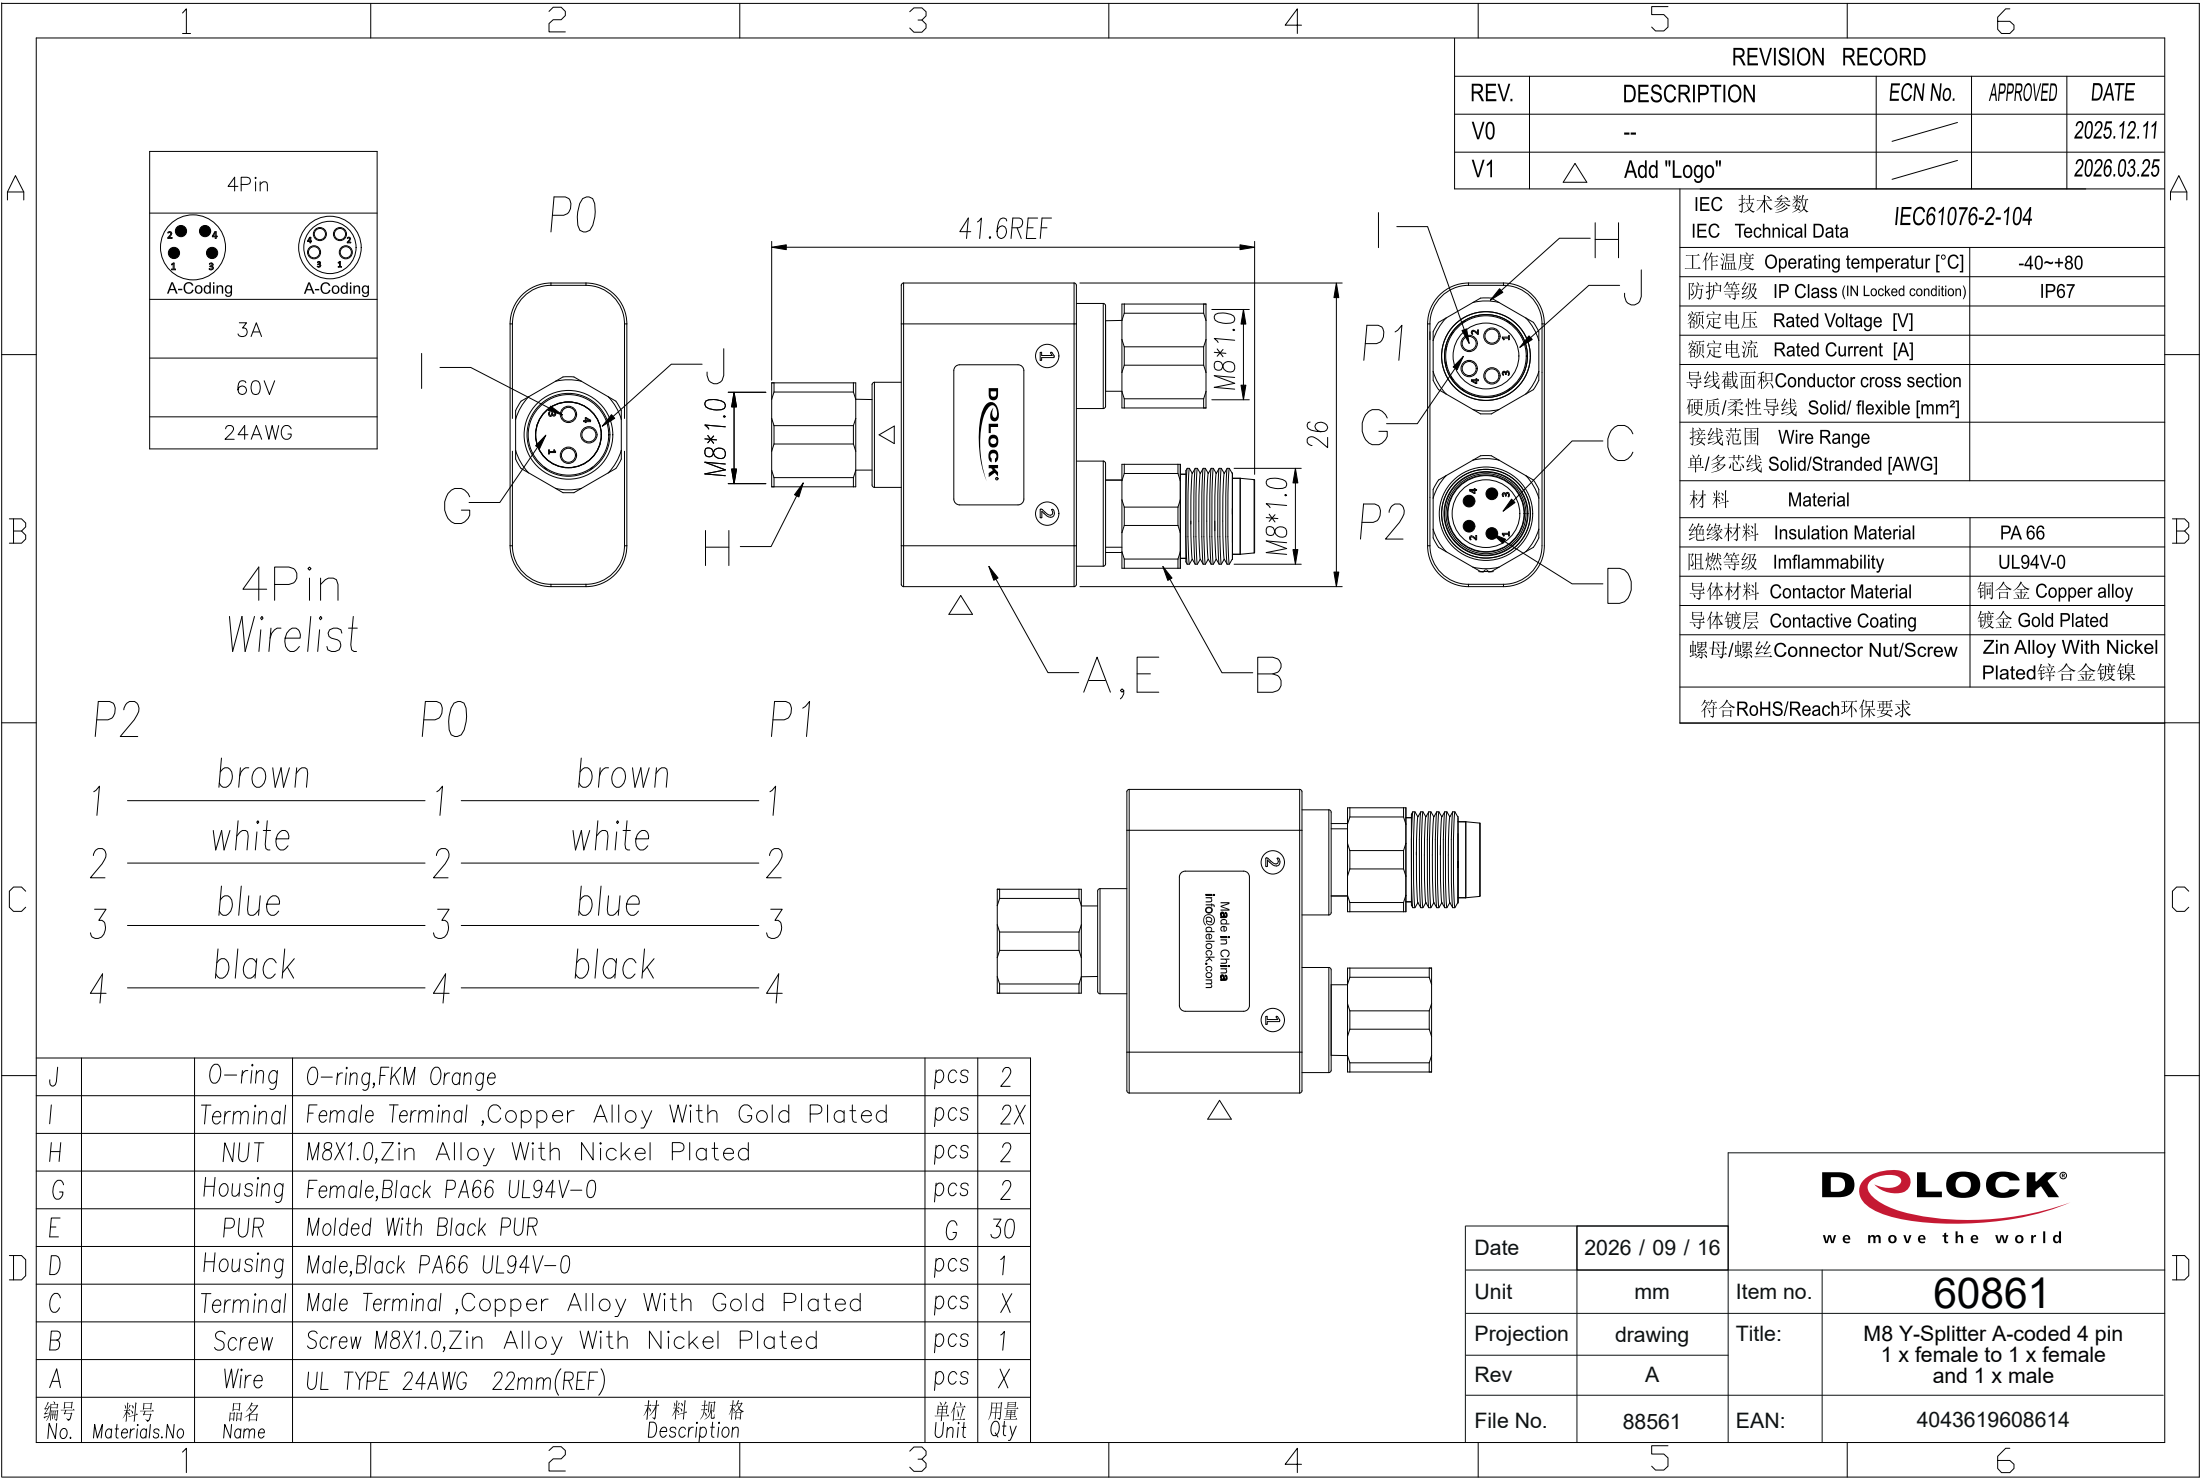

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2025.12.11
V1	△ Add "Logo"	—		2026.03.25

IEC 技术参数 IEC Technical Data		IEC61076-2-104
工作温度 Operating temperatur [°C]		-40~+80
防护等级 IP Class (IN Locked condition)		IP67
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积 Conductor cross section		
硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range		
单/多芯线 Solid/Stranded [AWG]		
材料 Material		
绝缘材料 Insulation Material		PA 66
阻燃等级 Imflammability		UL94V-0
导体材料 Contactor Material		铜合金 Copper alloy
导体镀层 Contactive Coating		镀金 Gold Plated
螺母/螺丝 Connector Nut/Screw		Zin Alloy With Nickel Plated 锌合金镀镍
符合RoHS/Reach环保要求		

J		O-ring	O-ring,FKM Orange	pcs	2
I		Terminal	Female Terminal ,Copper Alloy With Gold Plated	pcs	2X
H		NUT	M8X1.0,Zin Alloy With Nickel Plated	pcs	2
G		Housing	Female,Black PA66 UL94V-0	pcs	2
E		PUR	Molded With Black PUR	G	30
D		Housing	Male,Black PA66 UL94V-0	pcs	1
C		Terminal	Male Terminal ,Copper Alloy With Gold Plated	pcs	X
B		Screw	Screw M8X1.0,Zin Alloy With Nickel Plated	pcs	1
A		Wire	UL TYPE 24AWG 22mm(REF)	pcs	X
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

Date	2026 / 09 / 16	 we move the world Item no. 60861 Title: M8 Y-Splitter A-coded 4 pin 1 x female to 1 x female and 1 x male EAN: 4043619608614	
Unit	mm		
Projection	drawing		
Rev	A		
File No.	88561		