


80

Delock®, Beeskowdamm 13/15,D-14167 Berlin
info@delock.com Made in China

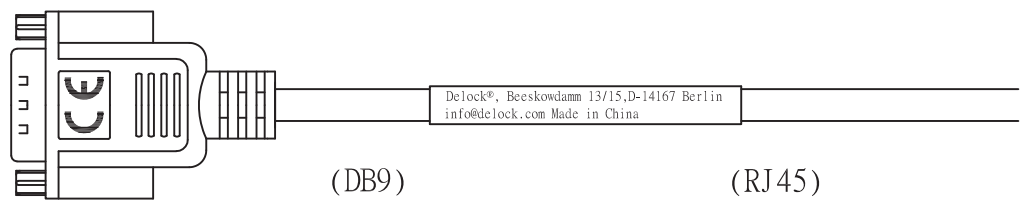

Back side
heat shrink tube color:black Ø6.0

- NOTES:
- 1.ELECTRICALTEST:100%OPEN,SHORT&MIS WIRE TEST.
 - 2.CONTACT RESISTANCE:10 ohm,
 - 3.INSULATOR RESISTANCE:5M ohm.
 - 4.HIGH VOLTAGE:DC 300V 0.01sec.
 - 5.MUST BE ROHS COMPLIANT.

(DB9)	(RJ45)	
7	1	CAN high
2	2	CAN low
3	3	GND
5	6	LIN(only automotive)
4	4	CAN high(Fault tolerant,only automotive)
1	5	CAN low(Fault tolerant,only automotive)
6	7	GND
9	8	V-LIN(12V DC,max,.200mA,only automotive)
SHELL	SHELL	

		TUB	HEAT SHRINK TUBE COLOR:BLACK Ø6.0 L=80mm	1	PCS
⑥		CONNECTOR	RJ45 8P8C PLUG MALE SHELL NICKEL PLATED	1	PCS
⑤		MOLDING	PVC 45P BLACK	13.6	G
④		MOLDING	PE	5.5	G
③		TIN WIRE	TIN WIRE OD:0.8MM	6.5	G
②		CONNECTOR	DB 9P MALE PIN GODED PLATED SHELL NICKEL PLASTIC:BLACK	1	PCS
①		CABLE	CAT5e STP 26AWG (7/0.16BC)*4P+AL+D JACKET: BLACK 50P PVC OD:5.7±0.15mm	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

DELOCK® we move the world			
Date	2026 / 02 / 26	Item no.	64351
Unit	mm	Title:	CAN Bus Cable RJ45 plug to D-Sub 9 pin male with nuts Cat.5e STP 1 m
Projection	drawing	Rev	A
File No.	88203	EAN:	4043619643516