



WIRING DIAGRAM

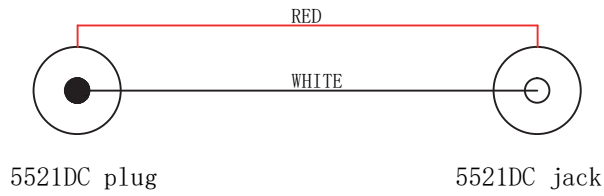

18AWG 2C POWER CORD

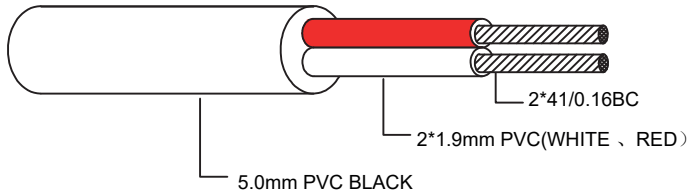

- 1.100% OPEN AND SHORT MISWIRE TEST
- 2.OPERATING VOLTAGE:12-24V
- NOMINAL VOLTAGE:12±10%V
- OPERATING CURRENT:11.6A MAX.
- POWER:140W MAX.

ROHS 3 support (EU 2015/863) Compliant

ITEM NO	LENGTH
66320	500±20
67383	1000±20
67384	2000±20

④	MOULD	PVC/BLACK	2	
③	JACK	5.5*2.1 DC JACK ,NICKEL PLATED SHELL	1	
②	PLUG	5.5*2.1 DC PLUG,NICKEL PLATED SHELL	1	
①	CABLE	18AWG BC*2C POWER CORD,JACKET:PVC/BLACK,OD5.0±0.2MM	1	
NO.	PART NAME	DESCRIPTION	1	REMARKS

Date	2025 / 10 / 22
Unit	mm
Projection	drawing
Rev	A
File No.	88345

DELICK® we move the world	
Item no.	66320
Title:	DC cable 2.1 x 5.5 mm plug to socket with screw lock, waterproof, 18 AWG, 0.5 m, black.
EAN:	4043619663200