


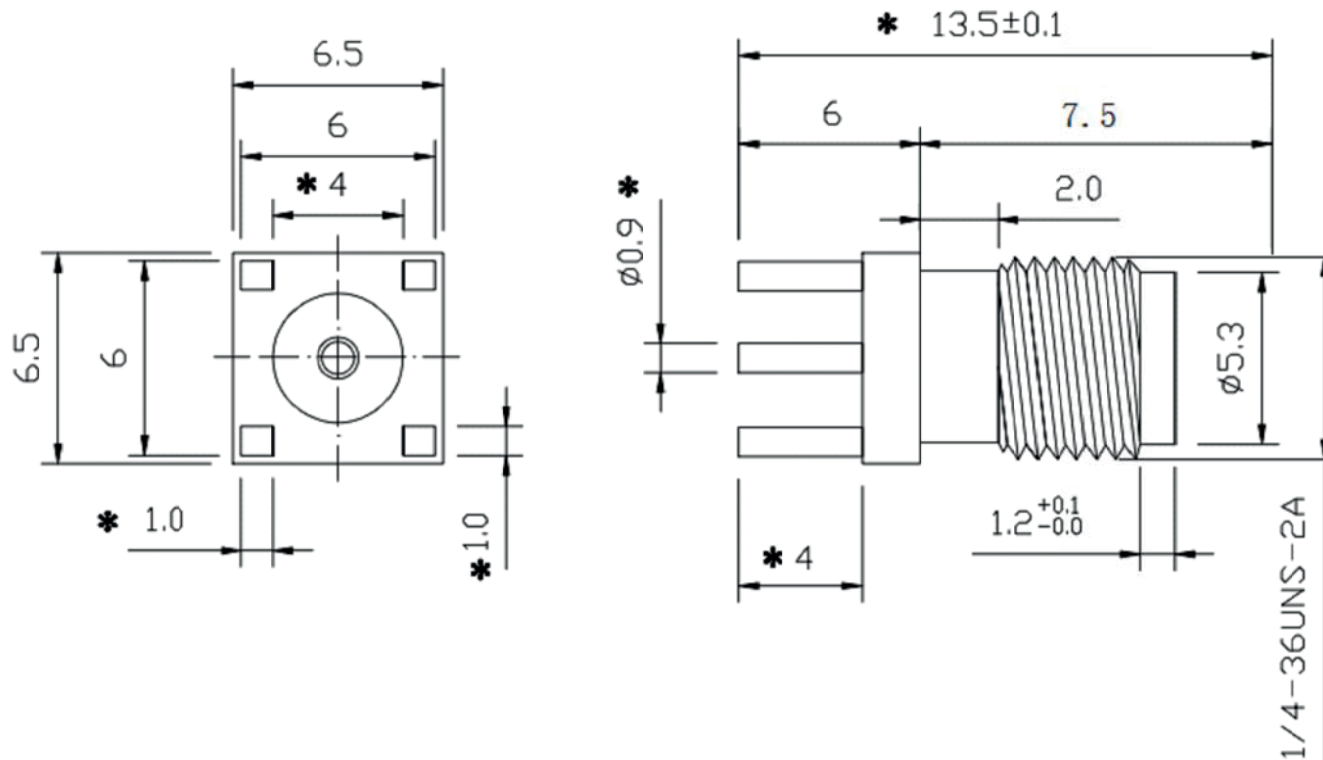

Body: Cu AU Plated  
Center Pin: CU AU Plated  
Insulator: PTFE

#### Electrical Characteristics

|                       |               |
|-----------------------|---------------|
| Frequency             | DC~6GHz       |
| V.S.W.R.              | ≤1.3          |
| Impedance             | 50±5Ω         |
| Voltage (breakdown)   | DC750V/ 50 Hz |
| Insertion Loss        | ≤ 0.1dB / GHz |
| Insulation Resistance | ≥500MΩ        |

#### Mechanical Characteristics

|               |      |
|---------------|------|
| Mating Cycles | >500 |
|---------------|------|

#### Environmental Characteristics

|               |                                                    |
|---------------|----------------------------------------------------|
| Salt Spray    | Temp :35°C; RH ≥95%; NaCl solution ≥5%; Time : 24H |
| Humidity      | 80°C/12H; 40°C/12H; RH ≥90%; Time :24H             |
| Thermal Shock | - 40°C/30' to + 80°C/30' ; Cycles : 24             |
| Aging test    | 80°C; Time :24H                                    |

**DELICK®**  
we move the world

|            |                |          |                                                               |
|------------|----------------|----------|---------------------------------------------------------------|
| Date       | 2026 / 01 / 20 | Item no. | 67411                                                         |
| Unit       | mm             | Title:   | SMA Jack straight on printed circuit board thread length 5 mm |
| Projection | drawing        |          |                                                               |
| Rev        | A              |          |                                                               |
| File No.   | 88545          | EAN:     | 4043619674114                                                 |