
WIRE LIST

CN 1		CN 2
+(1)	RED	Vbus(A4,B4,A9,B9)
-(2)	BLACK	GND(A1,B1,A12,B12,S)

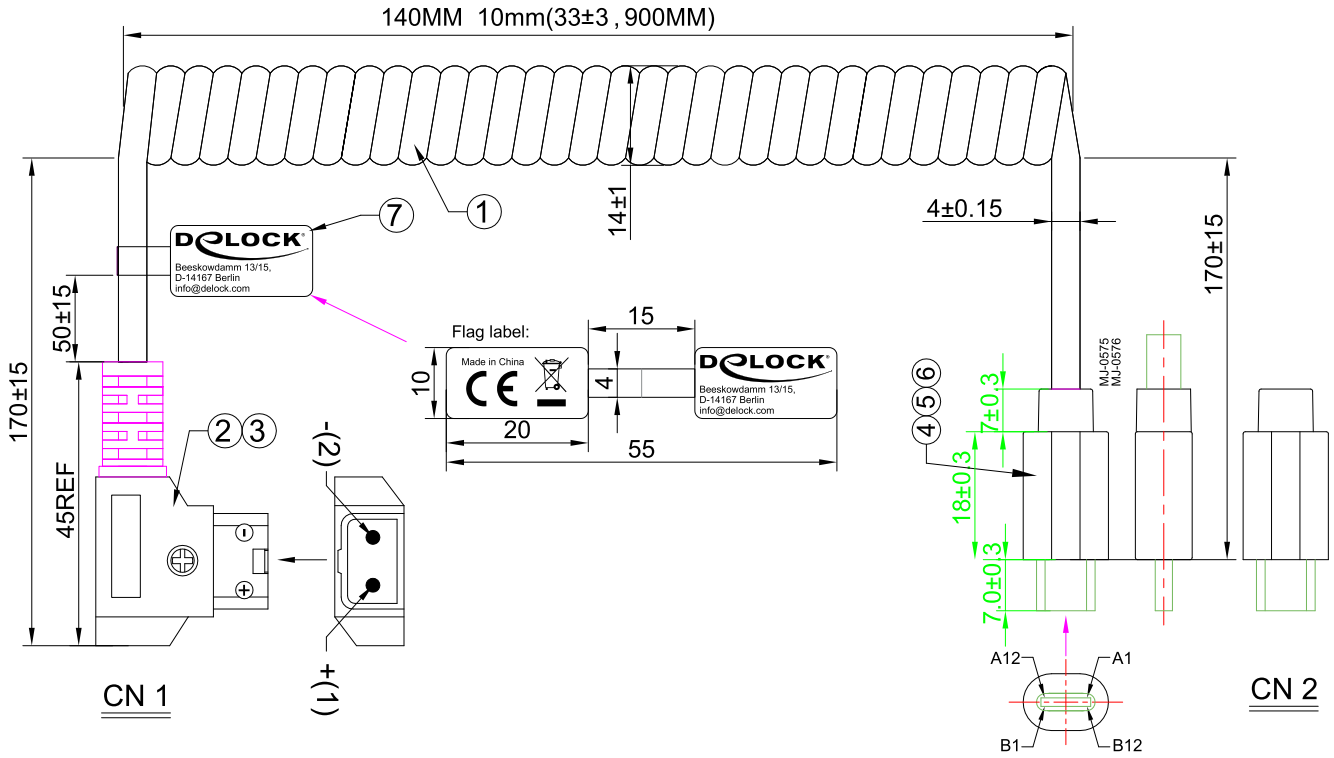

NOTE:

1.ALL material and process must to be accord ROHS 3 standard",
And IPC/WHMA-A-620 standard.

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE:10M Ohms(Min)
4. CONDUCTIVE RESISTANCE:3 Ohms(Max)

PACKAGING:

1= 1 x single item will be packed in one single neutral bag +PE BAG LABEL
10 = 10 x single bags will be packed in one bigger neutral bag
50 = 5 x big neutral bag will be packed in one inner carton
100 = 2 x inner carton will be packed in on export carton

NO.	NAME	DESCRIPTION	Q'TY	UNIT
1	CABLE	NO UL CABLE, AWG20*2C(RED,BLACK) OD:4.0mm TPU JACKET COLOR:BLACK	1	Pcs
		Spring line;Roll diameter lineØ14mm CLOSED:140mm; + both ends180MM		
2	CONNECTOR	D-TAP 2P, ASSEMBLY, 2 TERMINAL CONTACT:GOLD PLATED,BLACK MALE CONNECTOR,WITH SCREW	1	SET
3	SR	PVC-45P-BLACK	10	G
4	CONNECTOR	USB TYPE C, 2.0, 24P MALE,INSLATION:BLACK,CONTACT:GOLD PLATED,SHORT BODY,WITH PCB, P/N:U31M-AHLSN0324-0136	1	Pcs
5	INNER MOLD	LD-PE	8	G
6	OUTER MOLD	PVC-45P-BLACK	15	G
7	FLAG LABEL	SEE Flag label	1	Pcs
8	PE BAG LABEL	SIZE:75*50MM, SEE PE BAG LABEL	1	Pcs

Date	2026 / 10 / 01	DELOCK we move the world	
Unit	mm	Item no.	67692
Projection	drawing	Title:	D-Tap Coiled Cable to USB Type-C™ male 1 m
Rev	A		
File No.	88583	EAN:	4043619676927