



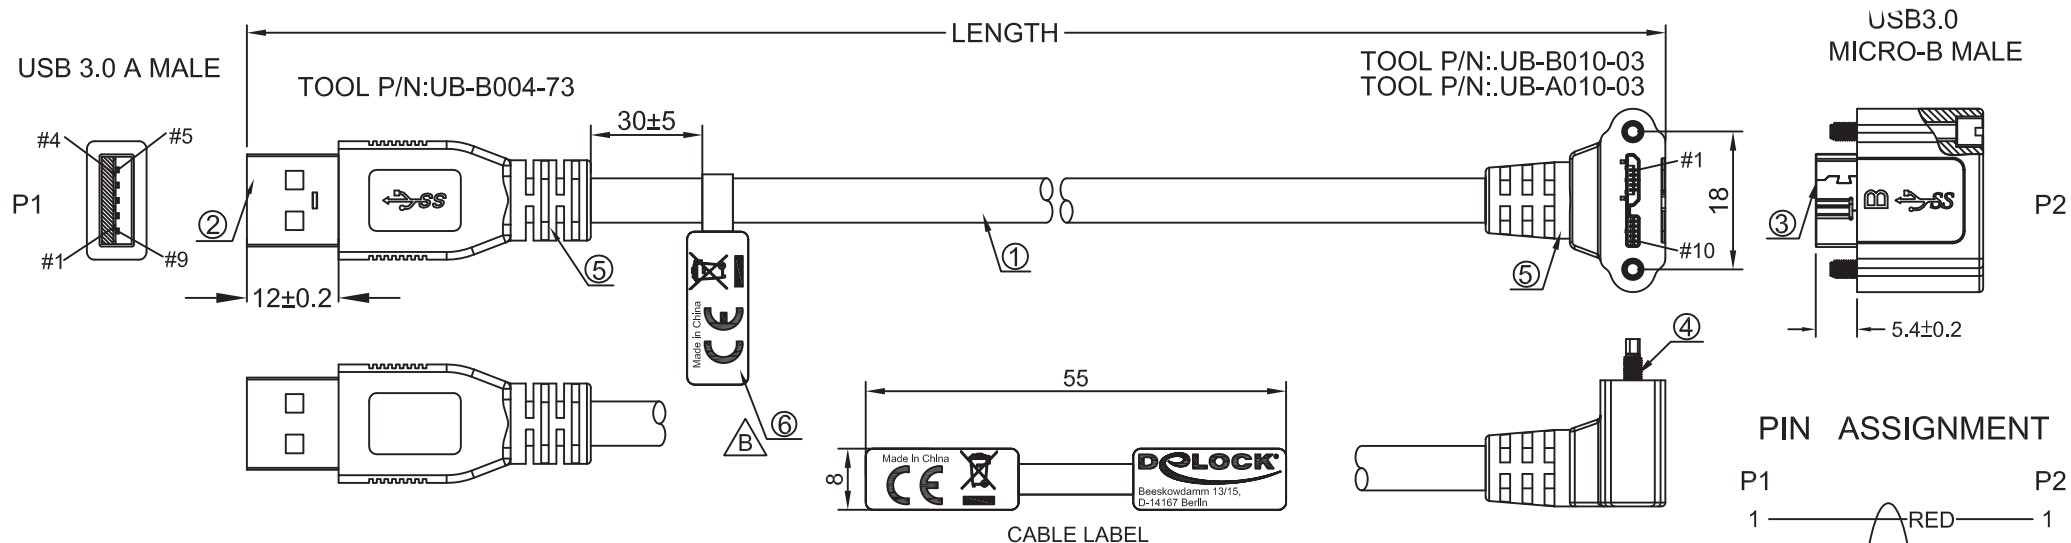

PIN ASSIGNMENT

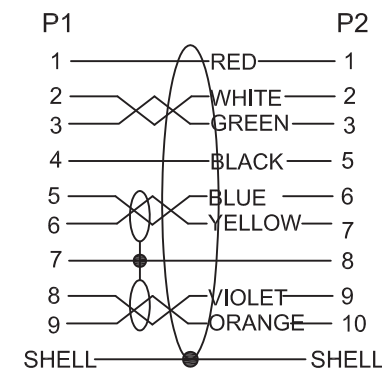

6	1	H13344	CABLE LABEL.
5		G0001	CONNECTOR OVERMOLD BLACK PVC.
4	2	C0413	SCREW:M2 OD:3.5*19.8MM,NICKEL PLATED.
3	1	A0674	USB3.0 MICRO-B,MALE,BLUE INSULATTOR, SOLDER TYPE.
2	1	A0710	USB 3.0 A ,MALE,BLUE INSULATTOR,SOLDER TYPE.
1	1	E0894	(27AWG*1P+EAM)*2PCS+(27AWG*1P+A)+ 26AWG*2C+AB OD:5.8MM,BLACK PVC JACKET,UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01Sec.
 - CONTACT RESISTANCE: 3ohm MAX.

Date	2025 / 11 / 20	 we move the world	
Unit	mm		
Projection	drawing		
Rev	A		
File No.	88461	Item no.	80483
		Title:	USB 5 Gbps Cable USB Type-A male straight to USB Micro-B male with screw distance 18 mm 90° upwards angled 1 m black
		EAN:	4043619804832