



Electrical Test:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 3 ohm (max).
3. Insulation Resistance: DC 300V/10ms, 10M ohm (MIN)

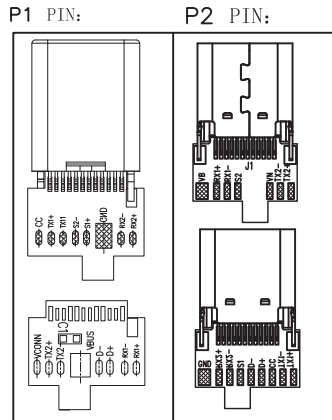

Pin Assignment:

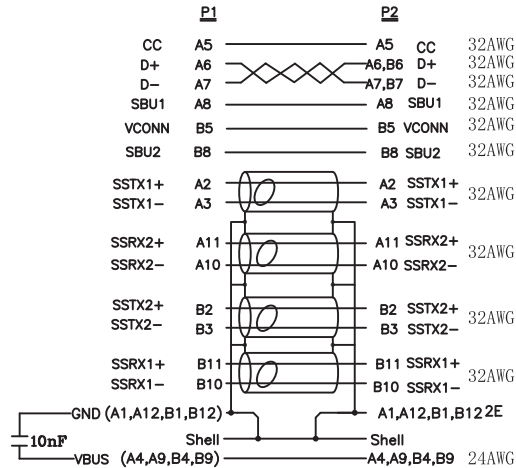

NO	DESCRIPTION	Q'TY	UNIT
7	Copper foil W=3MM 25u	0.08	M
6	Low-pressure forming material	1	G
5	TYPE C Up and down Mate Can	1	PCS
4	PVC 45P BLACK	12	G
3	USB 3.2 Type C Connector PCB+SMT+10NF Capacitor Nickel plating	1	PCS
2	USB3.1 CF Connector PCB+SMT Terminal Plating gold G/F	1	PCS
1	USB3.1 [32AWG (7/0.08TC)+EAM]*4P+32AWG (7/0.08TC)*1P+24AWG (41/0.08TC)*1C+32AWG (7/0.08TC)*4C+A2EB (16/10/0.08TC)OD:4.5MM BLACK PVC	1.01	M

Date	2025 / 08 / 22	Unit	mm	Item no.	87824
Projection	drawing	Title:	SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Cable USB Type-C™ male to female 1 m panel-mount black		
Rev	A	File No.	88101	EAN:	4043619878246

