


Parameter :

- 1. Test wavelength : 850nm
- 2. Radius of curvature : 5-12mm;
- 3. Apex offset : ≤50um;
- 4. Fiber Height : -100~+50nm;
- 5. Ins.loss ≤0.35dB Ret.loss: ≥35dB
- 6. pass rate for End-face geometric parameter: ND
- 7. Work temperature : -25 — +70 °C
- 8. Store temperature : -40 — +80 °C

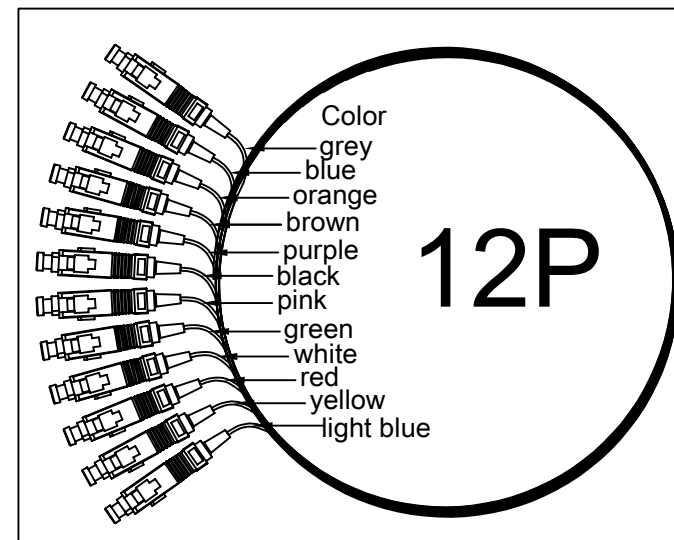

| | | | |
|----|-------------------------------|---------------|------|
| 4 | Dust Cap Color:Natural | 12 | PCS |
| 3 | Boot Color:Aqua Blue | 12 | PCS |
| 2 | SC Cconnector Color:Aqua Blue | 12 | PCS |
| 1 | OD0.9mm OM3 50/125um | 12 | PCS |
| NO | SPECIFICATION | See Structure | UNIT |

| | | | |
|--------------------------------------|----------------|----------|---|
| DEL LOCK we move the world | | | |
| Date | 2025 / 12 / 01 | Item no. | 91048 |
| Unit | mm | Title: | Fibre optic pigtail fanout cable 12 x SC UPC simplex male to 12 x open cable ends 1 m |
| Projection | drawing | Rev | A |
| File No. | 88534 | EAN: | 4043619910489 |