


Parameter :

1. Test wavelength : 1310nm
2. Radius of curvature : 5-12mm;
3. Apex offset :  $\leq 50\mu\text{m}$ ;
4. Fiber Height :  $-100\sim+50\text{nm}$ ;
5. Ins.loss  $\leq 0.35\text{dB}$  Ret.loss:  $\geq 35\text{dB}$
6. pass rate for End-face geometric parameter: ND
7. Work temperature :  $-25 \text{ --- } +70 \text{ }^\circ\text{C}$
8. Store temperature :  $-40 \text{ --- } +80 \text{ }^\circ\text{C}$

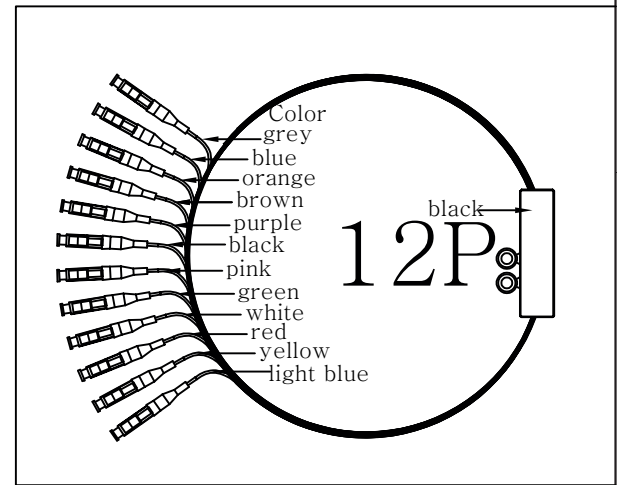

6	OD4.8*3.2mm Color:Yellow	1	PCS
5	Box Color:Black	1	PCS
4	Dust Cap Color:White	12	PCS
3	Boot Color:White	12	PCS
2	LC Cconnector Color:Blue	12	PCS
1	OD0.9mm 9/125um G652D LSZH	12	PCS
NO	SPECIFICATION	See Structure	UNIT

Date	2025 / 12 / 01
Unit	mm
Projection	drawing
Rev	A
File No.	88534

<b>DELICK®</b> we move the world	
Item no.	<b>91050</b>
Title:	Fibre optic pigtail fanout cable 12 x LC UPC simplex male to 12 x open cable ends 1 m
EAN:	4043619910502