


Parameter :

1. Test wavelength : 850nm
2. Radius of curvature : 5-12mm;
3. Apex offset : $\leq 50\mu\text{m}$;
4. Fiber Height : $-100\sim+50\text{nm}$;
5. Ins.loss $\leq 0.35\text{dB}$ Ret.loss: $\geq 30\text{dB}$
6. pass rate for End-face geometric parameter: ND
7. Work temperature : $-25 \text{ --- } +70 \text{ }^\circ\text{C}$
8. Store temperature : $-40 \text{ --- } +80 \text{ }^\circ\text{C}$

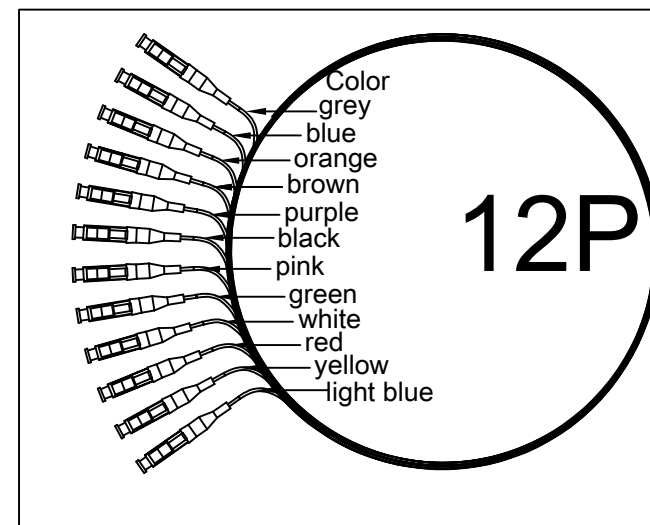

6	Heat shrink tubing Color:Black	1	PCS
5	Tube Color:Aqua Blue	1	PCS
4	Dust Cap Color:white	12	PCS
3	Boot Color:white	12	PCS
2	SC Cconnector Color:grey	12	PCS
1	OD0.9mm OM3 50/125um	12	PCS
NO	SPECIFICATION	See Structure	UNIT

Date	2025 / 12 / 01	DELICK® we move the world	
Unit	mm	Item no.	91054
Projection	drawing	Title:	Fibre optic pigtail fanout cable 12 x LC UPC simplex male to 12 x open cable ends 1 m
Rev	A	EAN:	4043619910540
File No.	88534		