

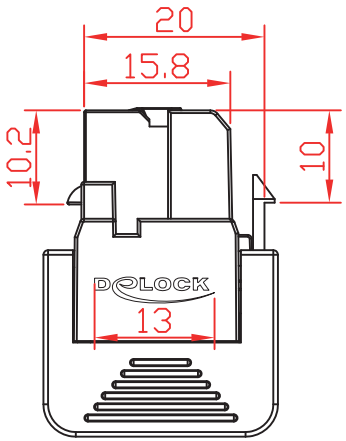

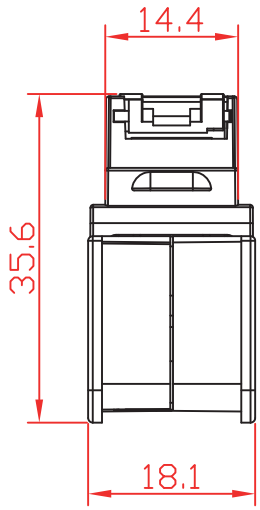

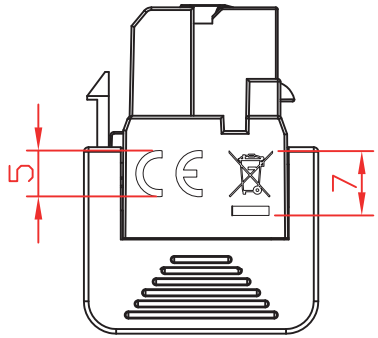



NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ11 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

Date	2025 / 09 / 30	DELOCK we move the world	
Unit	mm	Item no.	91084
Projection	drawing	Title:	Keystone module RJ45 female to IDC (LSA), Cat.6A, STP, 180°, tool-free, with braided shielding
Rev	A		
File No.	88525	EAN:	4043619910847