


SMA end launch jack straight at printed circuit board up to 1.7 mm thread length 9 mm

Description

The SMA coaxial jack by Delock is suitable for solder mounting on circuit board edges with a maximum thickness of 1.7 mm. The gold coating prevents corrosion and ensures an optimal connection.

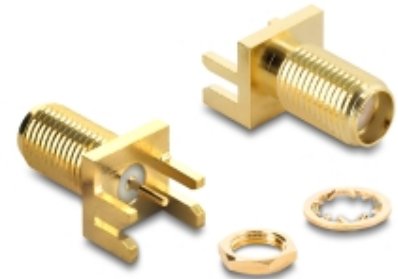

Item no. 67412

EAN: 4043619674121

Country of origin: China

Package: Zip poly bag

Technical details

- Connector: 1 x SMA jack
- Frequency range: DC - 6 GHz
- Housing: brass gold plated
- Impedance: 50 Ohm
- VSWR: < 1.3
- Insulator: PTFE
- Insulation resistance: > 5000 MOhm
- Mating Cycles: > 500
- Mounting type: surface-mounting technology
- Soldering: 5 solder points
- Operating temperature: -65 °C ~ 165 °C
- Withstanding voltage: 1000 V / 50 Hz
- Insertion loss: < 0.1 dB / GHz
- Thread type: 1/4" - 36 UNS - 2A
- Thread length: 9 mm
- Dimensions (LxWxH): ca. 17.8 x 9.5 x 7.9 mm

Package content

- SMA Jack
- Nut, toothed washer

General

Mounting type:	Soldering
----------------	-----------

Interface

Connector:	1 x SMA jack
------------	--------------

Technical characteristics

Frequency range:	0 - 6 GHz
Impedance:	50 Ω
Operating temperature:	-65 °C ~ 165 °C
VSWR:	< 1.3

Physical characteristics

Housing material:	copper gold plated
Pin finishing:	gold-plated
Thread type:	1/4" - 36 UNS - 2A
Insulator:	PTFE

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de

Website

www.delock.de

