


OCuLink to M.2 Key M NVMe SSD Converter

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. It allows the use of **PCIe M.2 SSD**. The converter can be installed into the system through the **OCuLink SFF-8612 interface**.

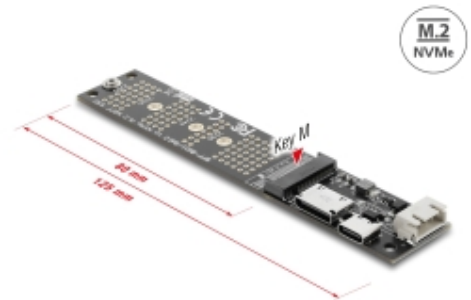

Item no. 64291

EAN: 4043619642915

Country of origin: China

Package: Box



Technical details

- Connectors:
 - 1 x OCUlink SFF-8612 female
 - 1 x M.2 key M slot
 - 1 x USB Type-C™ female (power supply)
 - 1 x 4 pin power connector
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Power supply via USB-C™ interface or via 4 pin power connector
- 1 x LED indicator
- Supports NVM Express (NVMe)
- Supports PCI Express 4.0 protocol
- Dimensions (LxWxH): ca. 126 x 24 x 8 mm

Package content

- Converter
- Power cable
- M.2 mounting material
- Screwdriver
- User manual

Images



General

| | |
|---|---|
| Specification: | M.2 PCI Express 4.0 NVM Express (NVMe) |
| LED indicator: | 1 x |
| Slot: | M.2 |
| Supported module: | M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported |

Interface

| | |
|------------|--|
| Connector: | 1 x M.2 key M slot 1 x 4 pin power connector male 1 x OCuLink SFF-8612 female 1 x USB Type-C™ female (power supply) |
|------------|--|

Physical characteristics

| | |
|---------------|--------|
| Cable length: | 20 cm |
| Length: | 126 mm |
| Width: | 24 mm |
| Height: | 8 mm |

Manufacturer information

| | |
|-------------|-------------------|
| Street | Beeskowdamm 13/15 |
| Postal code | 14167 |
| City | Berlin |
| Country | Deutschland |
| E-Mail | info@delock.de |
| Website | www.delock.de |