


Delock M.2 Key M to 1 x OCuLink SFF-8612 Converter

Description

This converter by Delock expands the system by one **OcuLink SFF-8612 interface**. It can be connected e.g. one SSD by using an optional cable. The converter transmits PCI Express signals using the **NVMe** protocol. Through the predetermined breaking point, the length can be **shortened from 80 mm to 60 mm**.

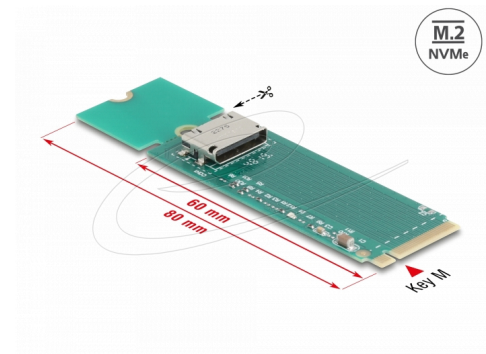

Item no. 64348

EAN: 4043619643486

Country of origin: China

Package: Box




Technical details

- Connectors:
 - 1 x M.2 key M male
 - 1 x OCuLink SFF-8612 female
- Interface: PCIe x4 Rev. 4.0
- Form factor: M.2 2280 (2260)
- Suitable for M.2 slot with key M based on PCIe
- 1 x LED indicator
- Bootable, ex UEFI version 2.3.1
- Supports NVM Express (NVMe)
- Operating temperature: -20 °C ~ 80 °C
- Storage temperature: -40 °C ~ 85 °C
- Humidity: 5 ~ 90 %
- Dimensions (LxWxH): ca. 80 x 22 x 5 mm

Package content

- Converter M.2 to SFF-8612
- User manual

Images



General

Form factor:	M.2 2260 M.2 2280
Function:	Bootable, ex UEFI 2.3.1
LED indicator:	1 x

Interface

Connectors:	1 x M.2 key M male 1 x OCuLink SFF-8612 female
-------------	---

Technical characteristics

Storage temperature:	-40 °C ~ 85 °C
Operating temperature:	-20 °C ~ 80 °C
Humidity:	5 ~ 90 %

Physical characteristics

Length:	80 mm
Width:	22 mm
Height:	5 mm

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de