


Converter M.2 Key M NVMe SSD to U.2 and M.2 Key B SATA SSD to SATA

Description

This converter by Delock enables the installation of an M.2 PCIe NVMe SSD with key M or SATA M.2 SSD with key B in 2280, 2260, 2242 and 2230 format. When using a NVMe SSD, the converter is connected to the U.2 interface, connected to the SATA interface when using a SATA SSD. It is also possible to **use both SSDs simultaneously**, provided the appropriate cables are connected.

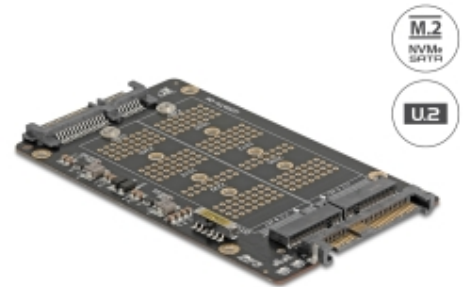

Item no. 64354

EAN: 4043619643547

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 1 x U.2 SFF-8639 male
 - 1 x SATA 6 Gb/s 22 pin plug
 - 1 x M.2 key M slot
 - 1 x M.2 key B slot
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M, key B or key B+M based on SATA or PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Supports S.M.A.R.T.
- Supports TRIM
- 4 x LED indicator
- 1 x switch for mode
- Dimensions (LxWxH): ca. 113 x 66 x 6 mm



System requirements

- A free U.2 SFF-8639 interface or
- A free SATA 22 pin interface

Package content

- Converter
- Screws
- Screwdriver
- User manual

Images



General

Function:	NVM Express (NVMe) TRIM S.M.A.R.T.
Specification:	M.2 SATA 6 Gb/s U.2
LED indicator:	4 x
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA

Interface

Connector:	1 x M.2 key B slot 1 x M.2 key M slot 1 x SATA 6 Gb/s 22 pin plug 1 x U.2 SFF-8639 male
------------	--

Physical characteristics

Length:	113 mm
Width:	66 mm
Height:	6 mm

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de