




Delock PCI Express x2 Karte auf 2 x 2,5 Gigabit LAN i225

Description

The PCI Express card by Delock offers **two network ports** with a data transfer rate **up to 2500 Mbps**.

NBASE-T for higher speed

Modern services and new technologies require higher bandwidths. NBASE-T technology enables speeds of 1 Gbps and 2.5 Gbps with conventional networking cables. The best possible transmission rate is set automatically.

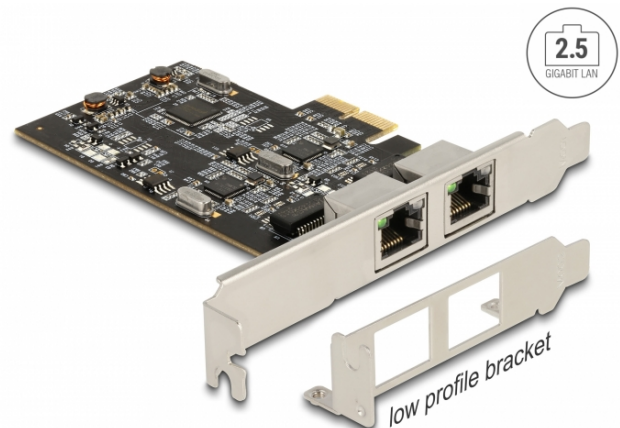

Specification

- Connectors:
 - external: 2 x 2.5 Gigabit LAN RJ45 jack
 - internal: 1 x PCI Express x2, V2.1
- Chipset: Intel i225V
- Data transfer rate:
 - Ethernet up to 10 Mbps
 - Fast Ethernet up to 100 Mbps
 - Gigabit Ethernet up to 1000 Mbps
 - NBASE-T with up to 2.5 Gbps
 - PCI Express x1 up to 4 Gbps
- Supports IEEE 802.3 / 802.3u / 802.3z / 802.3ab
- Supports Wake On LAN (WOL)
- Supports 9k Jumbo Frames
- Supports PXE
- LED indicator for link and activity

System requirements

- Linux Kernel 5.8 or above
- Windows 10/11
- PC with one free PCI Express x2 / x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item no. 89392

EAN: 4043619893928

Country of origin: China

Package: Retail Box

Images





General	
Supported operating system:	Linux Kernel 5.8.0 or above Windows 10 64-bit
LED indicator:	Link and activity
Interface	
External:	2 x Gigabit LAN RJ45 jack
Internal:	1 x PCI Express x2, V2.0
Technical characteristics	
Chipset:	Intel® i225V v3
Data transfer rate:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 2.5 Gbps
Physical characteristics	
Slot bracket:	low profile standard