




# Delock PCI Express Card to 1 x Serial with voltage supply ESD protection

## Description

The PCI Express card by Delock expands a PC by **one external serial port**. Connected devices can be optionally supplied with a **voltage of 5 V or 12 V**. By using the included **low profile bracket**, the PCI Express card can be also installed into a Mini-PC.

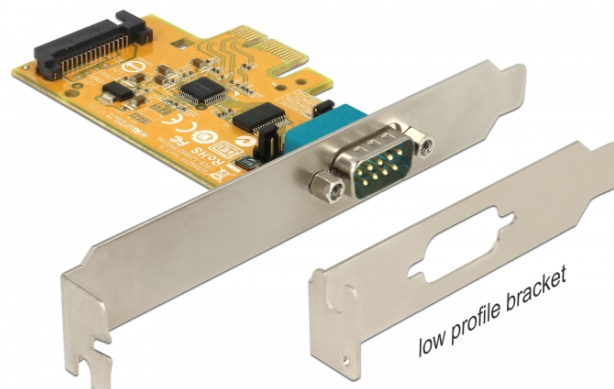

## Specification

- Connectors:
  - external:
    - 1 x serial RS-232 DB9 male
  - internal:
    - 1 x PCI Express x1, V2.0
    - 1 x SATA 15 pin plug
- Chipset: SUN2212
- Data transfer rate up to 115.2 Kbps
- FIFO: 128 byte
- Compatible with 16C950 UART
- $\pm 15$  kV ESD protection for all serial signals meets IEC1000-4-2 standard
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
- 5 V or 12 V can be set individually through the jumper (pin 1 or 9)
- Windows WHQL certified

## System requirements

- Linux Kernel 2.6.x or above
- Windows Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot
- Power supply with a free SATA power connector

## Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

## Item no. 90293



EAN: 4043619902934

Country of origin: China

Package: Retail Box



## Images





| General                     |                                                                                                                                                                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specification:              | RS-232 (EIA / TIA)<br>PCI Express 2.0                                                                                                                                                                                                                     |
| Supported operating system: | Windows 7 32-bit<br>Windows 7 64-bit<br>Windows 8.1 32-bit<br>Windows 8.1 64-bit<br>Windows 10 32-bit<br>Windows 10 64-bit<br>Windows Server 2008 R2<br>Windows Server 2012 R2<br>Windows Server 2012<br>Windows Server 2016<br>Linux Kernel 2.6 or above |
| Interface                   |                                                                                                                                                                                                                                                           |
| External:                   | 1 x serial RS-232 DB9 male                                                                                                                                                                                                                                |
| Internal:                   | 1 x SATA 15 pin male<br>1 x PCI Express x1, V2.0                                                                                                                                                                                                          |
| Technical characteristics   |                                                                                                                                                                                                                                                           |
| Data transfer rate:         | 115.2 Kb/s                                                                                                                                                                                                                                                |
| FIFO:                       | 128 byte                                                                                                                                                                                                                                                  |
| Voltage:                    | 5 V or 12 V can be set individually for each port through the jumper (pin 1 or 9)<br>Power over System (POS)                                                                                                                                              |
| UART:                       | 16C950                                                                                                                                                                                                                                                    |
| Physical characteristics    |                                                                                                                                                                                                                                                           |
| Slot bracket:               | low profile<br>standard                                                                                                                                                                                                                                   |