


Delock PCI Express x4 Card to 2 x external USB Type-C™ + 1 x internal USB 10 Gbps Type-E Key A and 1 x 19 pin USB pin header male - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **two external USB-C™ ports** as well as **one internal 19 pin USB pin header male** port and **one USB Type-E key A female** port.

Power supply via PCI Express interface

The card does **not need an additional power supply**. The power is supplied exclusively via the PCI Express interface.

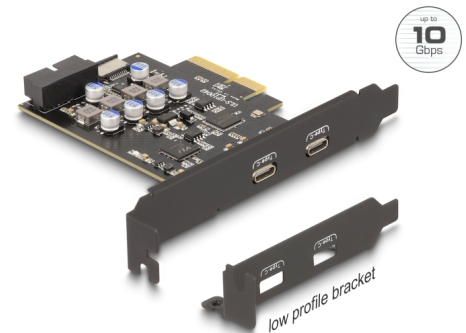

Item no. 90345

EAN: 4043619903450

Country of origin: China

Package: Box

Technical details

- Connectors:
external:
2 x USB 10 Gbps USB Type-C™ female
internal:
1 x USB 10 Gbps type-E Key A female
1 x 19 pin USB 10 Gbps pin header male
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142, VIA VL822
- Data transfer rate up to 10 Gbps
- Electrical power:
USB Type-C™: max. 15 watt (5 V / 3 A)
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.0
- Bootable


System requirements

- Linux Kernel 6.5 or above
- Windows 10/10-64/11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- User manual

Images



General

Form factor:	Low Profile
Function:	bootable
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Linux Kernel 6.5 or above

Interface

External:	2 x USB 10 Gbps USB Type-C™ female
Internal:	1 x PCI Express x4, V3.0 1 x USB 10 Gbps type-E Key A female 1 x 19 pin USB 10 Gbps pin header male

Technical characteristics

Chipset:	Asmedia ASM3142 VIA VL822
Data transfer rate:	10 Gbps

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de