# PCI Express x4 Network Card 2.5 Gigabit LAN 4 x RJ45 i225

## Description


The PCI Express card by Delock offers four network ports with a data transfer rate up to 2500 Mbps.

### Low Profile Form Factor

By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

### NBASE-T for higher speed

Modern services and new technologies require higher bandwidths. NBASE-T technology enables speeds of 1 Gbps and 2.5 Gbps with conventional networking cables. The best possible transmission rate is set automatically.

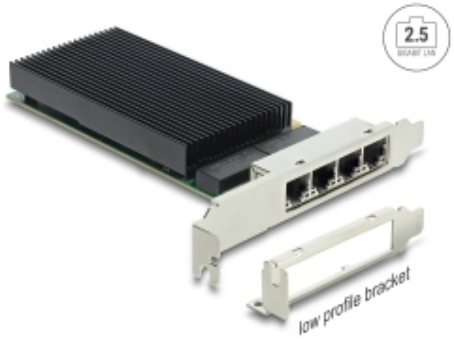


**Item no. 89393**

EAN: 4043619893935

Country of origin: China

Package: Brown Box

## Technical details

- Connectors:
  external: 4 x 2.5 Gigabit LAN RJ45 jack
  internal: 1 x PCI Express x4, V2.1
- Chipset: Intel i225V
- Data transfer rate:
  Ethernet up to 10 Mbps
  Fast Ethernet up to 100 Mbps
  Gigabit Ethernet up to 1000 Mbps
  NBASE-T with up to 2.5 Gbps
  PCI Express x4 up to 16 Gbps
- Supports IEEE 802.3 / 802.3u / 802.3ab
- Supports Wake On LAN (WOL)
- Supports 9k Jumbo Frames
- LED indicator for link and activity

## System requirements

- Linux Kernel 6.15 or above
- Windows 11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted. **© 2026 by Delock. All rights reserved.**

## Package content

- PCI Express card
- Low profile bracket
- User manual

## Images





All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted. **© 2026 by Delock. All rights reserved.**

## General

| | |
|---|---|
| Supported operating system: | Windows 11<br>Linux Kernel 6.15 or above |
| LED indicator: | Link and activity |

## Interface

| | |
|---|---|
| External: | 4 x Gigabit LAN RJ45 jack |
| Internal: | 1 x PCI Express x4, V2.1 |

## Technical characteristics

| | |
|---|---|
| Chipset: | Intel® i225V v3 |
| Data transfer rate: | Ethernet up to 10 Mbps<br>Fast Ethernet up to 100 Mbps<br>Gigabit Ethernet up to 1 Gbps<br>Gigabit Ethernet up to 2.5 Gbps |

## Physical characteristics

| | |
|---|---|
| Slot bracket: | standard<br>Low Profile |

### Manufacturer information


| | |
|---|---|
| Street | Beeskowdamm 13/15 |
| Postal code | 14167 |
| City | Berlin |
| Country | Deutschland |
| E-Mail | info@delock.de |
| Website | www.delock.de |


All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted. **© 2026 by Delock. All rights reserved.**



All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted. **© 2026 by Delock. All rights reserved.**