




Delock PCI Express Card > 2 x internal M.2 Key B with RAID - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. It can be connected up to two M.2 SATA modules in format 22110, 2280, 2260, 2242, 2230 to the card. When using more than one SSD, there is the possibility to use different RAID level.

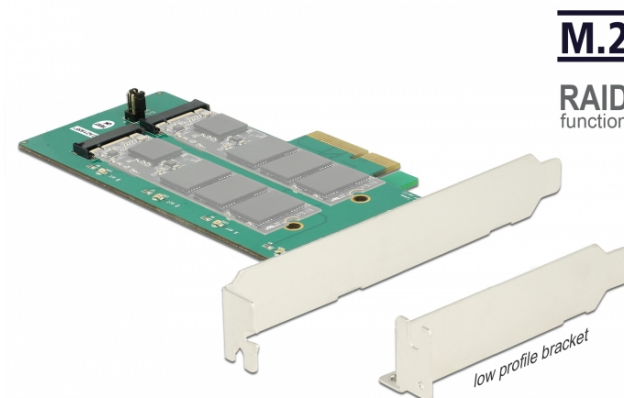

Specification

- Connector:
internal:
2 x 67 pin M.2 key B slot
1 x PCI Express x4
- Interface: SATA
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, SPAN
- 4 x LED indicator
- Bootable

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.3
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 2 x fixing screw
- User manual

Item no. 89536

EAN: 4043619895366

Country of origin: Taiwan, Republic of China

Package: Box



Images





General	
Supported operating system:	Linux Kernel 3.19 or above Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	4 x
Slot:	SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x PCI Express x4, V2.0 2 x 67 pin M.2 key B slot
Technical characteristics	
Data transfer rate:	6 Gb/s
RAID function:	SPAN 0 1