


D-Sub 9 pin female to 3 pin Terminal Block Adapter for CAN / LIN bus

Description

This adapter by Delock is suitable for PCAN, PLIN, and BabyLin applications. Strands with stripped ends can be connected to the terminal block.

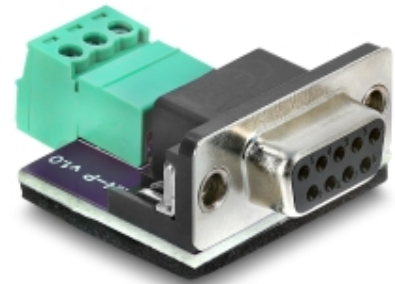

Item no. 91293

EAN: 4043619912933

Country of origin: China

Package: Zip poly bag


Technical details

- Connectors:
 - 1 x D-Sub 9 pin female
 - 1 x 3 pin terminal block
- Pitch: 3.81 mm
- Useable for a cable gauge from 22 to 18 AWG
- Suitable for PCAN, PLIN and BabyLin
- Pin assignment:
 - pin 1 - pin 3 / 5 / 6 GND
 - pin 2 - pin 7 LIN
 - pin 3 - pin 9 VBAT
- Dimensions (LxWxH): ca. 37 x 28 x 16 mm

Package content

- Adapter

Images



General

Suitable for conductor gauge:	22 - 18 AWG
-------------------------------	-------------

Interface

Connector 1:	1 x D-Sub 9 pin female
Connector 2:	1 x 3 pin terminal block

Physical characteristics

Pitch distance:	3.81 mm
Length:	37 mm
Width:	28 mm
Height:	16 mm

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de

